


RFID Bird Management Ring

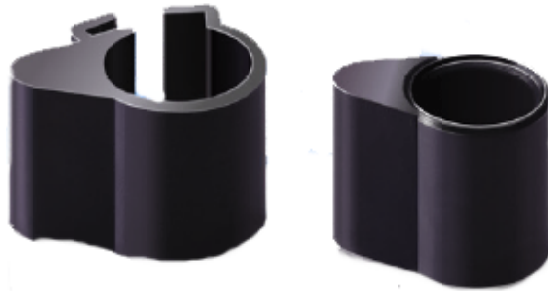

SYNOTag | RFID™

SMPL-001 RFID Bird Ring

125 KHz and 13.56 MHz Passive RFID bird tags with operating temperature range of -40 C ~ 80 C. Suited for RFID management of poultry and birds of all types for tracking and scientific testing applications. This RFID ring can also be used in other applications where a waterproof RFID ring form factor is desired.


Specification

- Size: \varnothing 18mm
- Reading Distance: 60mm depending on reader
- Weight: 2g
- Storage temperature: -40 to 80 Degrees Celsius
- Operating temperature: -40 to 80 Degrees Celsius
- Material: Nylon
- Waterproof: Yes

Available IC's

- GK4001 (125 KHz, 64bit, R/O)
- H4102 (125 KHz, 64 bit, R/O)
- Temic e5557/67 (125 KHz, 256 bit, R/W)
- I-Code (13.56 MHz, 512 bit, R/W, ISO 15693 & ISO/IEC 15693)
- Mifare 1 S50 (13.56 MHz, 1K Byte, R/W, ISO 14443 A)

Dimensions

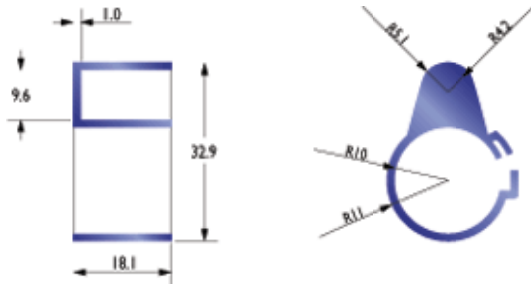

GPS | RFID | BIOMETRICS | INDUSTRIAL HANDHELDs | BUY DIRECT



Visit us at www.synometrix.com or email us at info@synometrix.com

For further information please contact:

John Hannon, Managing Director

SYNO METRIX | Asia Pacific Taipei, Taiwan

IDD: +886 2 2758 1279