




Specification

- Weight: Approx 4.8 g
- Storage temperature: -40 to 80 Degrees Celsius
- Operating temperature: -40 to 80 Degrees Celsius
- Material: Polyurethane
- Waterproof: Yes

Dimensions

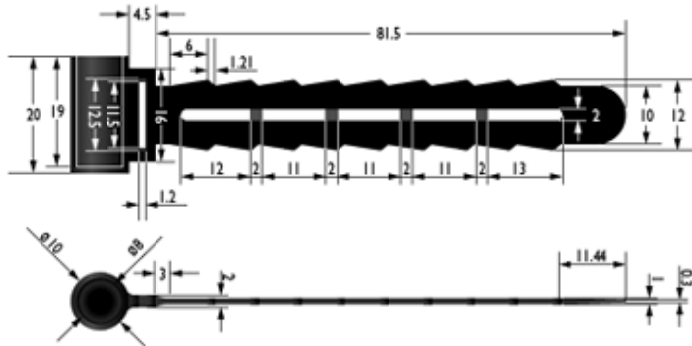

SMPL-002 RFID Wrap Tag

SYNOTag™ | **RFID**

SYNOTag™ | **Passive**

RFID Wrap Around Cable Tags

Waterproof 125 KHz and 13.56 MHz passive RFID wrap around cable tags with operating temperature range of -40 C ~ 80 C and up to 60 mm read range. Suited to applications where a wrap around RFID tag in this form factor is required.

Available IC's

- GK4001 (125 KHz, 64bit, R/O)
- H4102 (125 KHz, 64 bit, R/O)
- Temic e5557 (125 KHz, 256 bit, R/W)
- I-Code (13.56 MHz, 512 bit, R/W, ISO 15693 & ISO/IEC 15693)
- Mifare 1 S50 (13.56 MHz, 1K Byte, R/W, ISO 14443 A)



Product Warranty: SYNOMETRIX offers a standard 1 year repair or replace warranty from date of shipping on all products found to have a defect that results from manufacturing.

Visit us at www.synometrix.com or email us at info@synometrix.com

For further information please contact:
John Hannon, Managing Director
 SYNOMETRIX | **Asia Pacific** Taipei, Taiwan
 IDD: +886 2 2758 1279