


SYNO**Tag**™ | **Passive**

Waterproof RFID Screw-on Tags

Passive 125 KHz or 13.56 MHz waterproof RFID screw on tags with operating temperature of -40C ~ +70C. Suitable for applications where a waterproof tag in this form-factor is desired with read distance of up to 150 mm (depends on tag and reader).

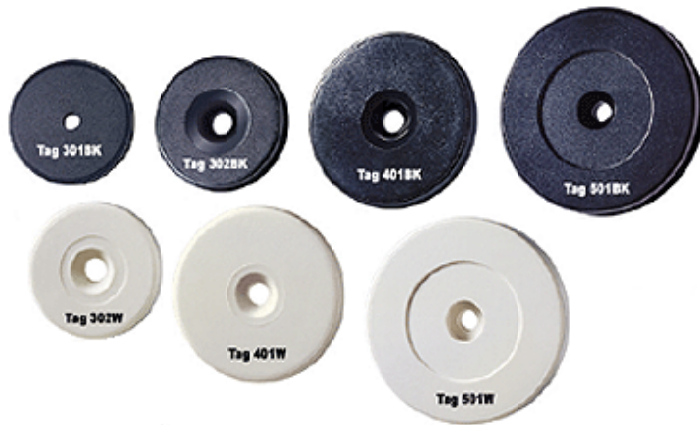

<u>Tag Type</u>	<u>Material</u>	<u>Dimensions</u>	<u>Thickness</u>	<u>Read Distance</u>
Tag 301	ABS	Ø 30mm Hole x 5mm	3 mm	50 mm
Tag 302	ABS	Ø 30mm Hole x 5mm	4 mm	50 mm
Tag 501	ABS	Ø 40mm Hole x 5mm	4.2 mm	80 mm
Tag 502	ABS	Ø 52mm Hole x 5mm	8 mm	150 mm

Available IC's

- GK4001 (125 KHz, 64bit, R/O)
- I-Code (13.56 MHz, 512 bit, R/W, ISO 15693 & ISO/IEC 15693)
- Mifare 1 S50 (13.56 MHz, 1K Byte, R/W, ISO 14443 A)



Product Warranty: SYNOMETRIX offers a standard 1 year repair or replace warranty from date of shipping on products found to have a defect that results from manufacturing.

Waterproof RFID Screw On Tags

Visit us at www.synometrix.com or email us at info@synometrix.com

SYNO**Tag**™ | **RFID**

For further information please contact:
John Hannon, Managing Director
SYNOMETRIX | **Asia Pacific** Taipei, Taiwan
IDD: +886 2 2758 1279