

## **SYNO**Tag™ | **UHF**


### **SM-1088 UHF RFID Tag | Up to 5 Meter Read Range**

860~960 MHz EPC Gen2 ISO/IEC 18000-6C waterproof and flexible UHF tag designed for use as a wristband, wrap tag, or to be affixed to any suitable surface.

#### Features

- ▶ Passive UHF frequency 860~960 MHz
- ▶ Typical read range: up to 5 meter (with ALIEN ALR-9800)
- ▶ Dimensions: 88mm (L) x 37mm (W) x 3mm (T)
- ▶ IC Type: ALN-9662 Squiggle-SH Inlay
- ▶ Programmed: Pre-programmed
- ▶ Waterproof: Yes
- ▶ Encapsulation: Silicon
- ▶ Operating Temperature: -20C~180C
- ▶ Storage Temperature: -30~180C

#### Dimensions

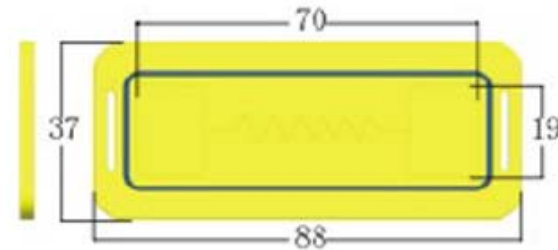

**Product Warranty:** SYNOMETRIX offers a standard 1 year repair or replace warranty from date of shipping on all products found to have a defect that results from manufacturing.

## **SM-1088 UHF All Purpose Tag**

# **SYNO**Tag™ | **RFID**

Visit us at [www.synometrix.com](http://www.synometrix.com) or email us at [info@synometrix.com](mailto:info@synometrix.com)

For further information please contact:  
John Hannon, Managing Director  
SYNOMETRIX | **Asia Pacific** Taipei, Taiwan  
IDD: +886 2 2758 1279