

SM-9911 & SM-9912 RFID Key Fob



13.56 MHz and 125 KHz RFID heavy duty use key rings and key fobs. Perfect for RFID key tagging and control, RFID access control, RFID building and asset security and customer loyalty programs read distance of up to 60 mm (depends on reader).

SPECIFICATIONS

Material: PCB-FR4

SM-9911: 45 mm (L) x 30 mm (W) Pear Shape

SM-9912: $\varnothing 30 \pm 0.2$ mm Round Shape (Black Only)

Storage temperature: -40 to 100 degrees C

Operating temperature: -40 to 80 degrees C


Colours: Silver, Black, Red, Green, Blue, Pink

AVAILABLE ICs

H4102 (125 KHz, 64 bit, R/O)

Temic e5557/6 (125 KHz, 256 bit, R/W)

I-Code (13.56 MHz, 512 bit, R/W, ISO 15693 & ISO/IEC 15693)

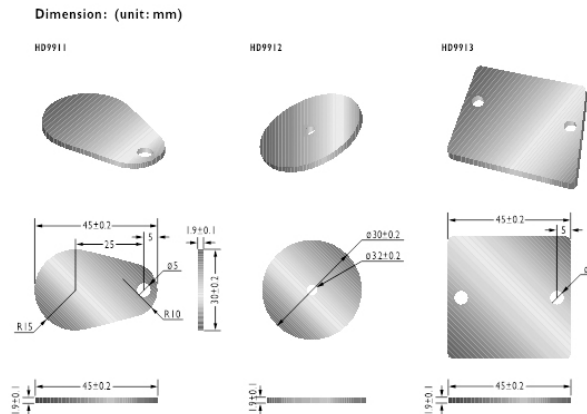

SYNOMETRIX offers a standard 1 year repair or replace warranty from date of shipping on products found to have a defect that results from manufacturing.